

BVR-Series

General Purpose Regulators

Available in 7 sizes and flows

1/4"

3/8"

1/2"

3/4"

1"

1-1/4"

1-1/2"

- Inline mounting
- Piston-type design (3/4" to 1-1/2")
- Diaphragm-type design (1/4" to 1/2")
- Self-relieving; non-relieving optional
- Pressure gauge (available upon request)
- Pressure adjustment locking key
- NPTF port threads



Model Shown: BVR02N1256

BurlingValve.com

TEXAS 4200 Main Avenue Groves, TX 77619

INDIANA 8250 N. 600 West McCordsville, IN 46055

317-335-2602 sales@burlingvalves.com

SPECIFICATIONS

Ambient/Media Temperature: 40° to 175°F (4° to 79°C)

Body: Zinc (1/4" to 1/2"), Aluminum (3/4" to 1-1/2")

Dome: Aluminum

Fluid Media: Compressed Air

Inlet Pressure: 300 psig (21 bar) maximum

Knob: Acetal

Outlet Pressure: See Table A

Pressure Adjustment Locking Key: Removable

Pressure Gauge: 0 to 200 psig (14 bar); 1/4" NPT gauge ports,

front and rear

Panel Mounting: 2-1/16 inch (52 mm) hole required

Seals: Nitrile


Valve: Brass (1/4" to 1/2"), Aluminum (3/4" to 1-1/2")

Valve Cap: Nylon

DIMENSIONS inches (mm) C ** В * Depth † Ib (kg) 5.8 (146) 1.3 (33) 2.8 (71) 2.06 (0.92) * Dome removal clearance; add 0.63 (16) ** Cap removal clearance: add 0.5 (13) † Less gauge. 1/4" to 1/2" DIMENSIONS inches (mm) Weight † C ** Α Depth † 6.1 (154) (62)(0.99)Dome removal clearance: add 0.63 (16). " Cap removal clearance: add 0.65 (16.5) † Less gauge. 3/4" and 1"

* Dome removal clearance: add 0.63 (16) ** Cap removal clearance: add 0.65 (16.5). † Less gauge.






Panel Nuts (2 EA): BV37-345F

Table A: Rating (psi)

Ratings Available			
#	02 03 04	06 08	10 12
020	•	•	
050	•	•	•
100		•	•
125	•		
150		•	•
175	•		

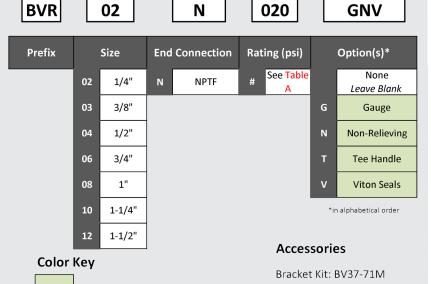

= Requires Adder Fee

psi INLET PRESSURE: 91 psig (6.3 bar) 5.6 PRESSURE 1/4 Ports 42 60 2.8 40 OUTLET 1.4 20 0 0 bar 7.0 INLET PRESSURE: 100 psig (7 bar) 3/8 Ports 5.6 PRESSU 42 60 2.8 40 Щ 150 1.4 20 OL INLET PRESSURE: 100 psig (7 bar) bar 7.0 1/2 Ports <u></u> 원 80 5.6 ET PRESSU 42 60 2.8 40 1.4 20 0 0 FLOW 1/s 0 16 32 48 64 80 96 bar psig INLET PRESSURE: 91 psig (6.3 bar) PRESSURE 60 40 3/4 Ports 5 4 3 OUTLET 2 20 1 bar psig UR 80 5 1 Ports PRESSUI 4 3 2 山 20 1 150 0 scfm 0 100 200 300 400 500 600 700 **FLOW** 1/s0 50 100 150 200 250 300 bar psig INLET PRESSURE: 91 psig (6.3 bar) 出80 1-1/4 Ports 4 3 占₂₀ OUTL psig bar 品80 1-1/2 Ports 4 3 OUTLET 0 2 scfm 0 100 200 300 400 500 600 700 800 900 **FLOW** 1/s0 50 100 150 200 250 300 350 400

Burling Valve - 2017.v3 | 2